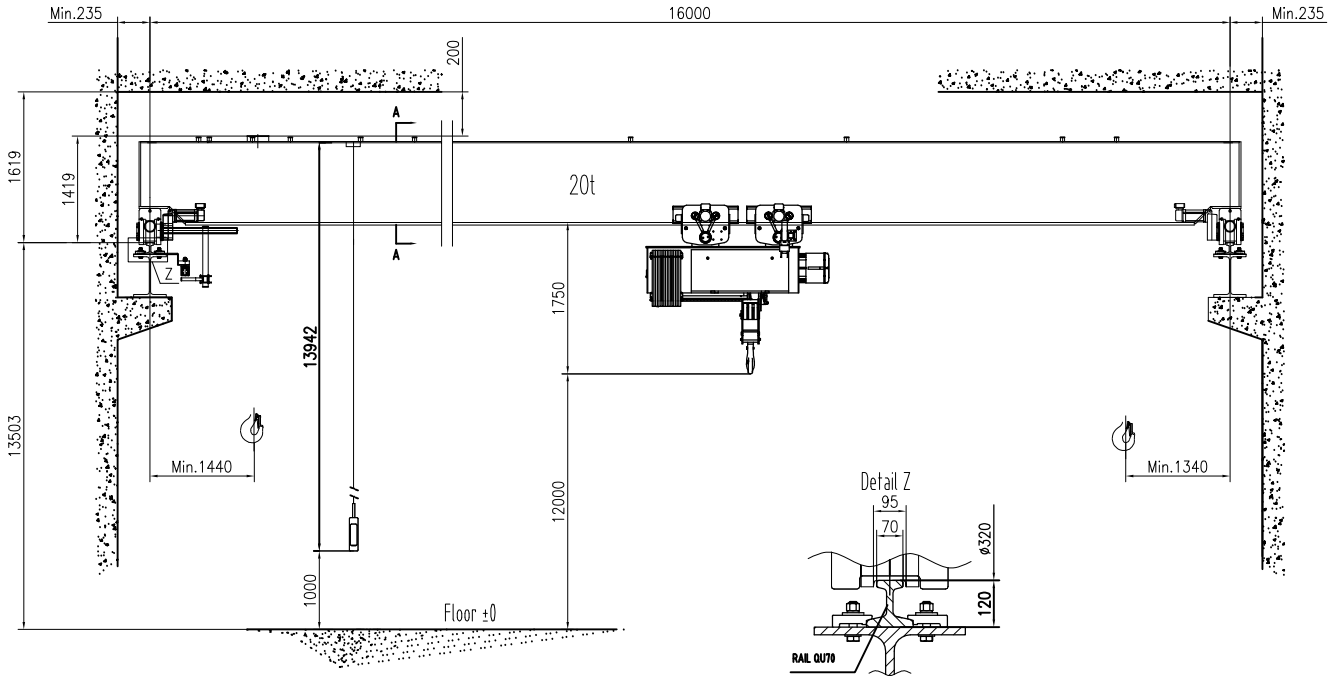


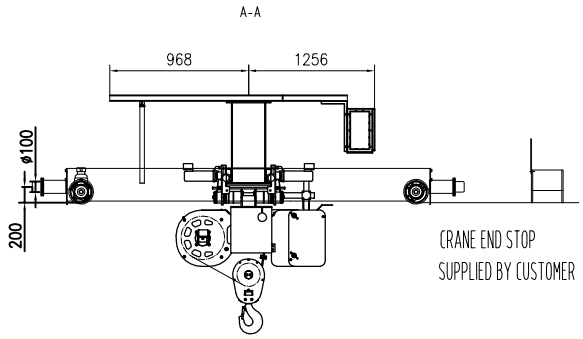


## TECHNICAL DATA

| | |
|---|---|
| LOAD | 20t |
| SPAN | 16m |
| LIFTING HEIGHT | 12m |
| HOISTING SPEED | 4/0.7 m/min 2-SPEED |
| TRAVERSING SPEED | 0-20 m/min STEPLESS |
| TRAVELLING SPEED | 0-32 m/min STEPLESS |
| WEIGHT OF TROLLEY | 1.61t |
| WEIGHT OF CRANE | 7.9t |
| POWER SUPPLY | 380V/48V/50Hz |
| CRANE GROUP | FEM A5 |
| HOIST GROUP | M4(FEM 1Am ) |
| BRIDGE TRAVEL GROUP | M5(FEM 2m) |
| SUPPLY POWER | 19.8kW |

TOLERANCES ACC. TO ISO/FEM STANDARD
BRIDGE PAINT: E120/RAL1028
DRAWING NOT IN SCALE

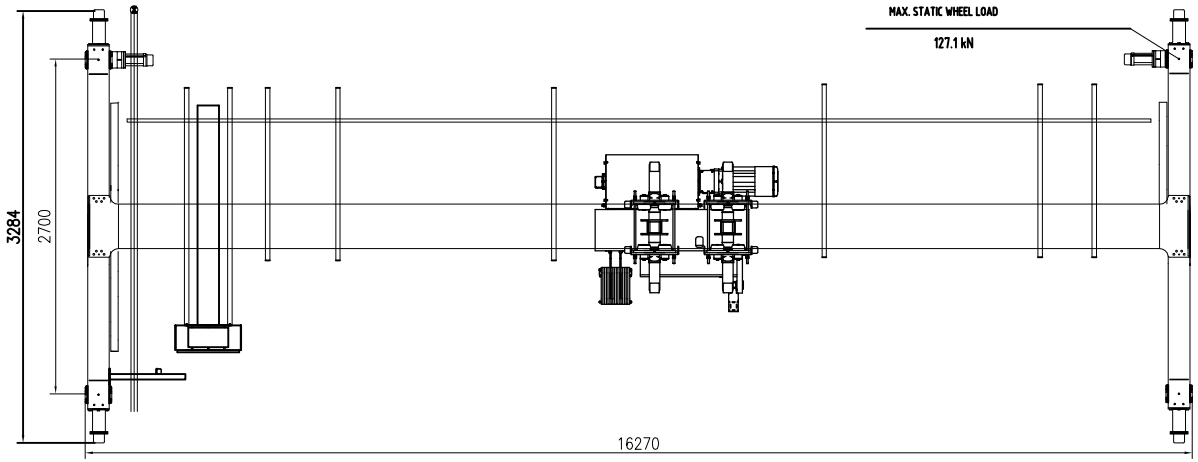


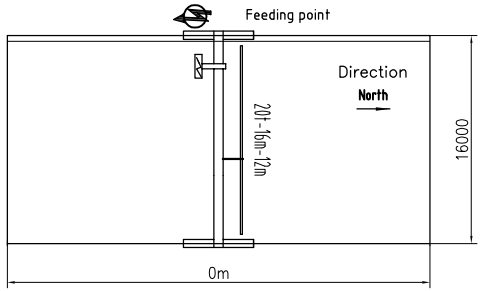


PRELIMINARY DRAWING,OFFER ONLY.

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | Name | | RU02 |
| | | | | | | | Material code | | Part Name |
| Rev. | Pcs. | Area | | ModiIndex | Modified | Date | | | |
| Designed | | RU02 | 2024/03/21 | Standardized | | | Stage | Weight(Kg) | Issue |
| Checked | | | | Approved | | 2024/03/21 | | 7900 | A0 |
| Verified | | | 2024/03/21 | | | Size | | | |
| Processed | | | | Scale | 1:35 | A2 | Total | Page | DWG No. |

KS20t x 16m x 12m-A5

HOIST